

# Products Information

## DT-38,DT-26







### APPLICATIONS 用途

watch, Clock, pager, Security system, etc.  
手表, 钟, 传呼机, 防盗系统, 等等。

### FEATURES 特征

- A cylinder-shaped package. 柱状封装。
- Dedicate to use at low frequency products. 适用于低频率产品。
- Suitable for high - density mounting. 适合高密度组装。

### OUTLINE DIMENSIONS [mm]

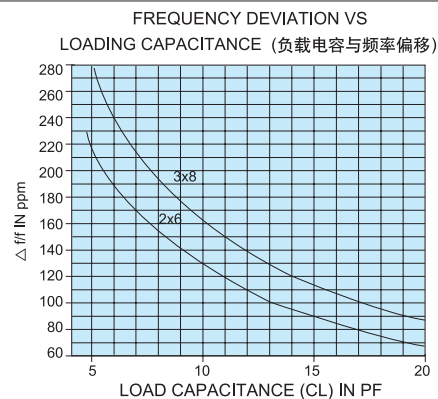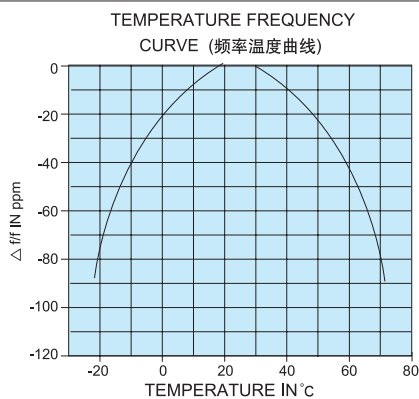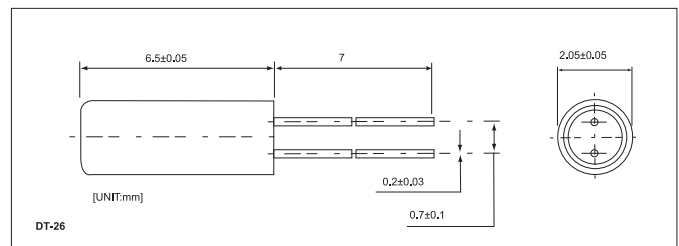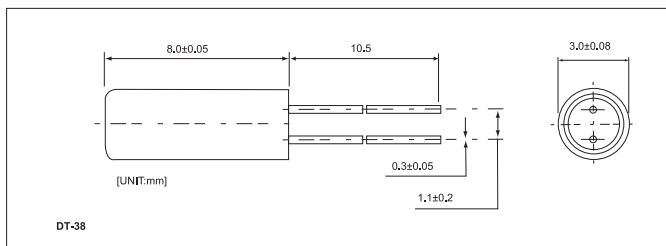

### STANDARD SPECIFICATION

Type	型号	DT-38, DT-26	
Frequency Range	频率范围	32.768KHz	25~100KHz
Vibration mode	切型/振荡	Tuning Fork 调谐叉	
Frequency tolerance(at +25 °C)	调整频差	±5ppm~±20ppm	±5ppm~±20ppm
Temperature Coefficient	温度频差	K:-0.035±0.005ppm/°C	
Operating temperature range	工作温度	-10~+60 °C	
Equivalent series resistance	等效电阻	30K,40K(Ω)	30K~50K(Ω)
Load capacitance	负载电容	10pF, 12.5pF, etc.	
Shunt capacitance	静电容	DT-38:1.6pF Typ. DT-26:1.5pF Typ.	
Level of drive	激励功率	10μW max.	
Aging	老化率	±3, ±5ppm/year	
Storage temperature range	储存温度	-55~+125 °C	

Please consult for other specifications. (若有其它规格需求请告知)