


Products Information

SM-26F

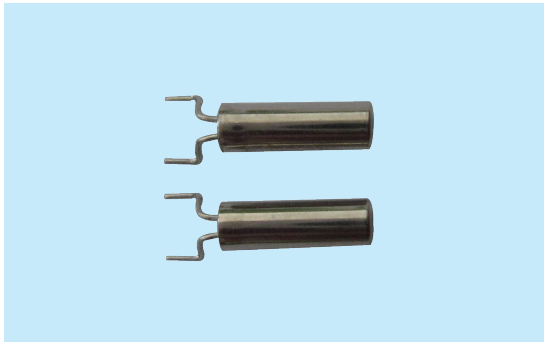

APPLICATIONS 用途


watch, Clock, pager, Security system, etc.

手表, 钟, 传呼机, 防盗系统, 等等。


FEATURES 特征

- A cylinder-shaped package. 柱状封装。
- Dedicate to use at low frequency products. 适用于低频率产品。
- Suitable for high - density mounting. 适合高密度组装。

Dimensions [mm]

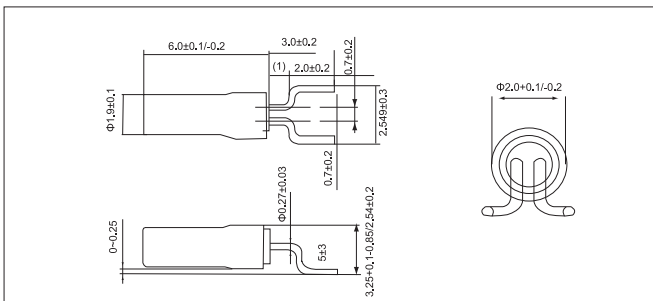

Recommended Land Pattern [mm]

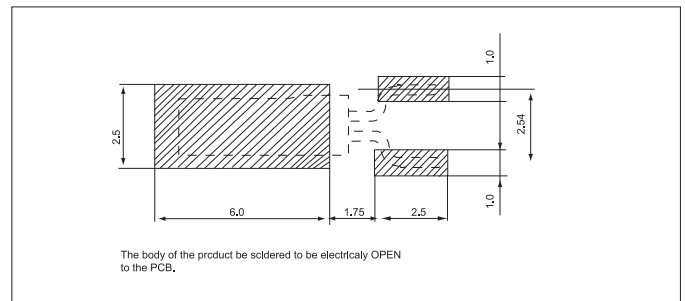

STANDARD SPECIFICATION

Item	Type	SM-26F
Frequency Range		32.768kHz(30~100kHz)
Load Capacitance		12.5pF
Drive Level		1.0±0.2μW
Frequency Tolerance		±10~30ppm(at 25°C)
Series Resistance		50kΩmax.
Turnover Temperature		25°C±50°C
Two Dimensional Temperature Constant		-0.04×10 ⁻⁶ °C max.
Operating Temperature Range		-10~+60°C
Storage Temperature Range		-40~+85°C
Shunt Capacitance		1.1PF Typ.
Packing Unit		3000pcs/reel

Please consult for other specifications. (若有其它规格需求请告知)