


Products Information

SM7050

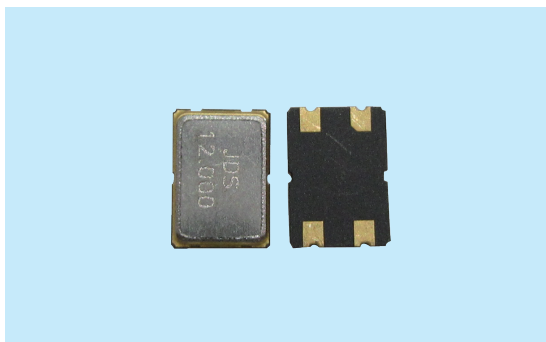


■ 用途

无线电话、小灵通、手机、卫星导航、蓝牙、网卡等


■ 特征

- 高精密及高稳定性。
- 无铅符合绿色环保。
- 回流焊、偏带包装。


■ DIMENSIMS [mm]

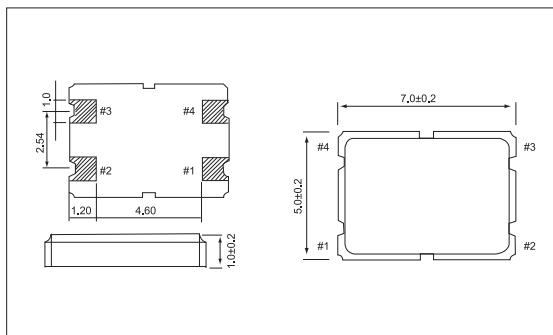

■ INTERNAL CONNECTION

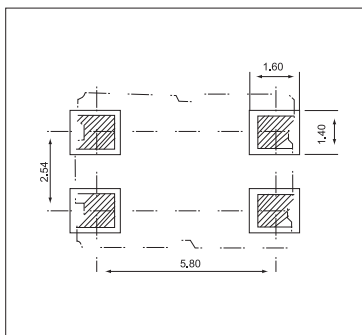

■ RECOMMENDED LAND PATTERN

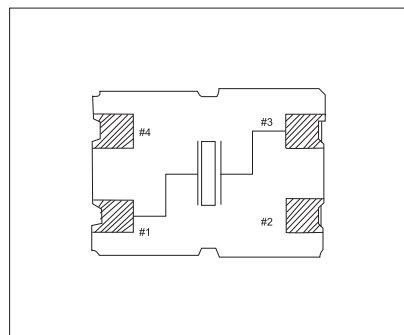

■ STANDARD SPECIFICATION

Item	Type	SM7050		
		6~8MHz	8~40MHz	40~100MHz
Frequency Range		6~8MHz	8~40MHz	40~100MHz
Mode		Fundamental		3rd overtone
Load Capacitance		Series, 12pF, 16pF, 20pF		
Drive Level		10μW (300μ WMax.)		10μW (1m WMax.)
Frequency Tolerance		10ppm, ±20ppm, ±30ppm((at 25 °C)		
Equivalent Series Resistance		100Ω Max.	50Ω Max.	80Ω Max.
Frequency Stability(Temp)		±10ppm/-10~+60 °C ±20ppm/-20~+70 °C ±30ppm/-40~+85 °C		
Storage Temp.Range		-55~+125 °C		

Please consult for other specifications. (若有其它规格需求请告知)